

DHO1000 Series

Digital Oscilloscope



Data Sheet

DSA32104-1110

Nov. 2022

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110

TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com

www.fesupply.com | www.rigolthai.com

Line Official



Facebook




DHO1000 Series Digital Oscilloscope



Adopting RIGOL's
**Brand New
Self-developed**
Chipset "Centaurus"


Highlights


- Ultra-low noise floor for cleaner signals, measuring small signals more accurately
- 12-bit resolution ($2^{12}=4096$) to see the most signal detail
- Up to 2 GSa/s real-time sample rate
- A maximum of 100 Mpts memory depth, capturing more detailed signals over longer time spans
- Standard serial decoding: SPI, I2C, RS232/UART, CAN, and LIN
- 10.1-inch large HD touch display (1280 x 800) designed for better touch interactions
- Front-panel Flex Knobs, bringing smoother interaction and easier measurements

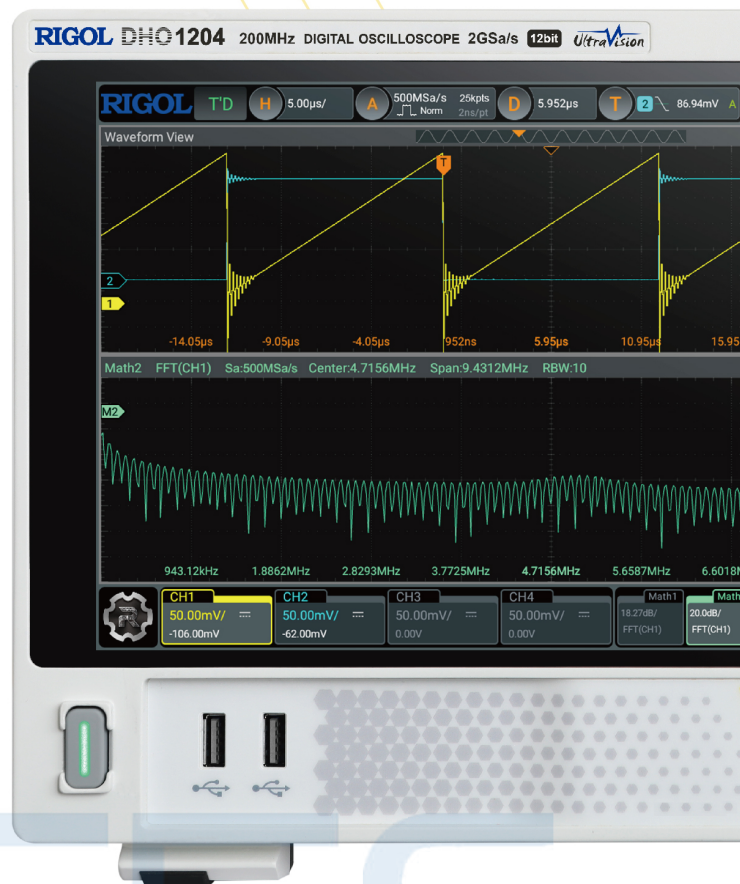

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



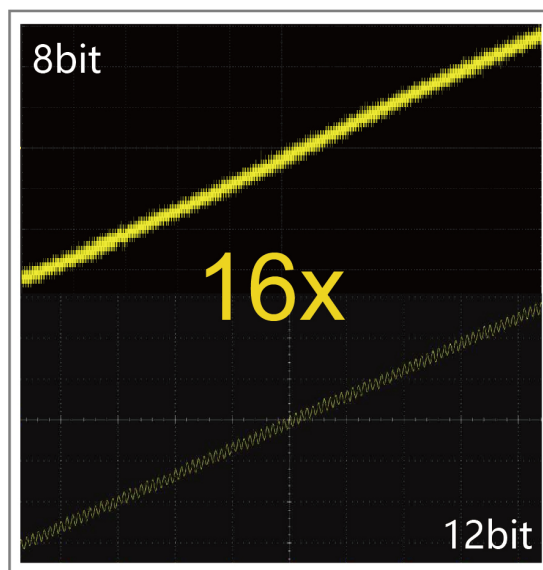

Entry Level

High Resolution
Digital Oscilloscope,
Best Budget Oscilloscope
for Beginners

Applications




An oscilloscope is an important tool for making power supply measurements. With up to 12-bit vertical resolution, the DHO1000 series makes it easy for you to perform ripple measurement and quality test.



Education

This series redefines what you can expect in an entry-level oscilloscope by providing excellent noise performance and 12-bit high resolution, providing basic functionality for higher education.

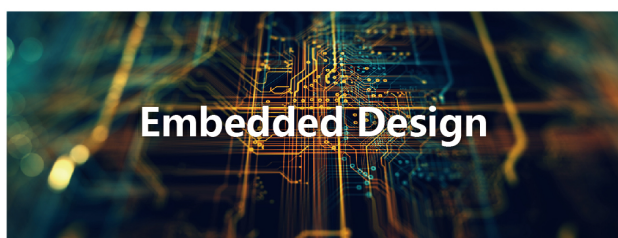


The 10.1-inch large HD touch display enables better view of signals. Large memory depth and the Autoscale function make it ready for testing of embedded system designs.



With standard CAN and LIN serial decoding functions, it provides a more affordable solution for automotive electronics testing.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Product Features

Product Features

- Brand-new chipset "Centaurus" developed by RIGOL
- Ultra-low noise floor for cleaner signals, measuring small signals accurately
- 12-bit vertical resolution^[1]
- 70/100/200 MHz analog bandwidth (selectable), 2/4 analog channels, and 1 EXT channel
- Up to 2 GSa/s real-time sample rate
- Max. memory depth: 100 Mpts (optional)
- Vertical sensitivity range: 500 μ V/div to 10 V/div
- Up to 1,500,000 wfms/s waveform capture rate with the UltraAcquire mode
- 10.1" 1280*800 HD touch display
- User-friendly Flex Knobs, bringing smoother interaction
- Standard photoelectric encoder operating knobs, effectively prolonging its service life
- Standard USB Device & Host, LAN, and HDMI interfaces


DHO1000 series digital oscilloscope is designed to meet the designing, debugging, and testing requirements of the mainstream oscilloscope market. Adopting the brand-new chipset "Centaurus" developed by RIGOL, this series achieves a fast waveform capture rate of 1,500,000 wfms/s with the UltraAcquire mode, 100 Mpts memory depth, 12-bit vertical resolution, all combined with excellent noise floor performance and vertical accuracy to meet your requirements for more accurate measurements, bringing extraordinary T&M experience for you.

NOTE:

[1]: 16 bits in High Resolution mode.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com




RIGOL Probes and Accessories Supported by the Series

RIGOL Passive Probes

Model	Type	Description
High-impedance Probe		
 PVP2150	High-impedance Probe	- Attenuation: 10:1/1:1 1X BW: DC to 35 MHz 10X BW: DC to 150 MHz - Compatibility: All models of RIGOLdigital oscilloscopes
 PVP2350	High-impedance Probe	- Attenuation: 10:1/1:1 1X BW: DC to 35 MHz 10X BW: DC to 350 MHz - Compatibility: All models of RIGOLdigital oscilloscopes
 PVP3150	High-impedance Probe	- Attenuation: 10:1/1:1 1X BW: DC to 20 MHz 10X BW: DC to 150 MHz - Compatibility: All models of RIGOLdigital oscilloscopes
 RP3500A	High-impedance Probe	- Attenuation: 10:1 - BW: DC to 500 MHz - Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, MSO8000A, DHO4000/1000, and DS70000 series.
High Voltage Single-ended Probe		
 RP1010H	High Voltage Probe	- Attenuation: 1000:1 - BW: DC to 40 MHz - DC: 0 to 10 kV DC - AC: pulse ≤ 20 kVp-p - AC: sine ≤ 7 kV_{rms} - Compatibility: All models of RIGOLdigital oscilloscopes

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Model	Type	Description
 RP1018H	High Voltage Probe	- Attenuation: 1000:1 - BW: DC to 150 MHz - DC+AC_{peak}: 18 kV CAT II - AC_{rms}: 12 kV CAT II - Compatibility: All models of RIGOLdigital oscilloscopes
 RP1300H	High Voltage Single-ended Probe	- Attenuation: 1000:1 - BW: DC to 300 MHz - CAT I 2000 V (DC+AC) - CAT II 1500 V (DC+AC) - Compatibility: All models of RIGOL digital oscilloscopes
High Voltage Differential Probe		
 PHA0150	High Voltage Differential Probe	- BW: DC to 70 MHz - Max. voltage $\leq$ 1500 Vpp - Compatibility: All models of RIGOLdigital oscilloscopes
 PHA1150	High Voltage Differential Probe	- BW: DC to 100 MHz - Max. voltage $\leq$ 1500 Vpp - Compatibility: All models of RIGOLdigital oscilloscopes
 PHA2150	High Voltage Differential Probe	50X BW: DC to 160 MHz 500X BW: DC to 200 MHz - Max. voltage $\leq$ 1500 Vpp - Compatibility: All models of RIGOLdigital oscilloscopes
 RP1025D	High Voltage Differential Probe	- BW: DC to 25 MHz - Max. voltage $\leq$ 1400 Vpp (DC + AC P-P) - Compatibility: All models of RIGOLdigital oscilloscopes
 RP1050D	High Voltage Differential Probe	- BW: DC to 50 MHz - Max. voltage $\leq$ 7000 Vpp (DC + AC P-P) - Compatibility: All models of RIGOLdigital oscilloscopes

Model	Type	Description
 RP1100D	High Voltage Differential Probe	- BW: DC to 100 MHz - Max. voltage ≤ 7000 Vpp (DC + AC P-P) - Compatibility: All models of RIGOLdigital oscilloscopes
Current Probe		
 RP1001C	Current Probe	- BW: DC to 300 kHz - Maximum Input AC: ± 100 A AC P-P: 200 A AC RMS: 70 A - Compatibility: All models of RIGOLdigital oscilloscopes
 RP1002C	Current Probe	- BW: DC to 1 MHz - Maximum Input AC: ± 70 A AC P-P: 140 A AC RMS: 50 A - Compatibility: All models of RIGOLdigital oscilloscopes
 RP1003C	Current Probe	- BW: DC to 50 MHz - Maximum Input AC P-P: 50 A (non-continuous) AC RMS: 30 A - Compatibility: All models of RIGOLdigital oscilloscopes - Required to order RP1000P power supply.
 RP1004C	Current Probe	- BW: DC to 100 MHz - Maximum Input AC P-P: 50 A (non-continuous) AC RMS: 30 A - Compatibility: All models of RIGOLdigital oscilloscopes - Required to order RP1000P power supply.

Model	Type	Description
 RP1005C	Current Probe	- BW: DC to 10 MHz - Maximum Input - AC P-P: 300 A (non-continuous), 500 A (@pulse width ≤ 30 us) - AC RMS: 150 A - Compatibility: All models of RIGOLdigital oscilloscopes - Required to order RP1000P power supply.
 RP1006C	Current Probe	- BW: DC to 2 MHz - Maximum Input - AC P-P: 700 A peak, non-continuous - AC RMS: 500 A - Compatibility: All models of RIGOLdigital oscilloscopes - Required to order RP1000P power supply.
 RP1000P	4CH Power Supply	Four-channel power adapter for RP1003C, RP1004C, RP1005C, and RP1006C Current Probes.

Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

Overview of the DHO1000 Series Technical Specifications

Overview of the DHO1000 Series Technical Specifications

Model	DHO1072	DHO1074	DHO1102	DHO1104	DHO1202	DHO1204
Analog Bandwidth (-3 dB)	70 MHz	70 MHz	100 MHz	100 MHz	200 MHz	200 MHz
Input Channels	2+EXT	4+EXT	2+EXT	4+EXT	2+EXT	4+EXT
Rise Time (10% to 90%, Typical)	≤5 ns	≤5 ns	≤3.5 ns	≤3.5 ns	≤1.75 ns	≤1.75 ns
Sampling Mode	Real-time sampling					
Max. Sample Rate of Analog Channels	2-channel model: 2 GSa/s (single channel ^[1]), 1 GSa/s (all channels ^[3]) 4-channel model: 2 GSa/s (single channel ^[1]), 1 GSa/s (half channels ^[2]), 500 MSa/s (all channels ^[3])					
Standard Memory Depth	2-channel model: 50 Mpts (single channel ^[1]), 25 Mpts (all channels ^[3]) 4-channel model: 50 Mpts (single channel ^[1]), 25 Mpts (half channels ^[2]), 12.5 Mpts (all channels ^[3])					
Optional Memory Depth	2-channel model: 100 Mpts (single channel ^[1]), 50 Mpts (all channels ^[3]) 4-channel model: 100 Mpts (single channel ^[1]), 50 Mpts (half channels ^[2]), 25 Mpts (all channels ^[3])					
Max. Waveform Capture Rate	50,000 wfms/s (Vector Mode) 1,500,000 wfms/s (UltraAcquire Mode)					
Vertical Resolution	12 bits					
Hardware Real- time Waveform Recording and Playing	Up to 500,000 frames					
Peak Detect	Capture glitches as narrow as 2 ns					

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Overview of the DHO1000 Series Technical Specifications

Display Size and Type 10.1-inch capacitive multi-touch display

Display Resolution 1280 × 800

Vertical System Analog Channels

Vertical System Analog Channels

Input Coupling DC, AC, or GND

Input Impedance 1 MΩ ± 1%

Input Capacitance 19 pF ± 3 pF

Probe Attenuation Ratio 0.001X, 0.002X, 0.005X, 0.01X, 0.02X, 0.05X, 0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X, 20X, 50X, 100X, 200X, 500X, 1000X, 2000X, 5000X

CAT I 300 V_{rms}, 400 V_{pk} (DC + V_{peak})

Maximum Input Voltage No transient overvoltage allowed whether the probe is used or not.
Remarks Use this instrument only for measurements within its specified measurement category (not rated for CAT II, III, IV).

Vertical Resolution 12 bits

Effective Number of Bits (ENOB, Typical) >8

Input Sensitivity Range^[4] 500 μV/div to 10 V/div

Offset Range ±1 V (≤65 mV/div)
±10 V (>65 mV/div, ≤270 mV/div)
±20 V (>270 mV/div, ≤2.75 V/div)
±100 V (>2.75 V/div, ≤10 V/div)

Dynamic Range ±4 div (12 bits)

Bandwidth Limit (Typical) 20 MHz, FULL; selectable for each channel

Vertical System Analog Channels

DC Vertical Gain Accuracy ^[4]	$\pm 2\%$ full scale
DC Vertical Offset Accuracy	≤ 200 mV/div (± 0.1 div ± 2 mV $\pm 1.5\%$ of offset setting) > 200 mV/div (± 0.1 div ± 2 mV $\pm 1.0\%$ of offset setting)
Channel-to-channel Isolation	$\geq 100:1$
ESD Tolerance	± 8 kV (for input BNC)

Horizontal System Analog Channels

Horizontal System Analog Channels

Time Base Range	2 ns/div to 1 ks/div Time base fine adjustment setting available	
Time Base Resolution	400 ps	
Time Base Accuracy	± 5 ppm ± 1 ppm/year	
Time-base Delay Time Range	Pre-trigger	-5 div
	Post-trigger	1 s or 100 div, whichever is greater
Δ Time Accuracy	$\pm$ (time base accuracy x reading) $\pm$ (0.001 x screen width) ± 50 ps	
Channel-to-channel Deskew	Channel-to-channel deskew range: ± 100 ns, accuracy: ± 1 ps	
Analog Channel-to-Channel Delay (Typical)	≤ 2 ns ^[5]	
Horizontal Mode	YT	Default mode
	XY	On channel 1/2/3/4
	SCAN	Time base ≥ 200 ms/div
	ROLL	Time base ≥ 50 ms/div or ≥ 100 ms/div (selectable), available to enter or exit the ROLL mode by turning the horizontal timebase knob

Acquisition System

Acquisition System

Max. Sample Rate of Analog Channels	2-channel model: 2 GSa/s (single channel ^[1]), 1 GSa/s (all channels ^[3]) 4-channel model: 2 GSa/s (single channel ^[1]), 1 GSa/s (half channels ^[2]), 500 MSa/s (all channels ^[3])	
Max. Memory Depth of Analog Channels	2-channel model (standard): 50 Mpts (single channel ^[1]), 25 Mpts (all channels ^[3])	
	2-channel model (optional): 100 Mpts (single channel ^[1]), 50 Mpts (all channels ^[3])	
	4-channel model (standard): 50 Mpts (single channel ^[1]), 25 Mpts (half channels ^[2]), 12.5 Mpts (all channels ^[3])	
	4-channel model (optional): 100 Mpts (single channel ^[1]), 50 Mpts (half channels ^[2]), 25 Mpts (all channels ^[3])	
Acquisition Mode	Normal	Default mode
	Peak Detect	Capture glitches as narrow as 2 ns
	Average	Selectable from 2, 4, 8, 16...to 65,536
	High Resolution	14 bits, 16 bits
	UltraAcquire	Up to 1,500,000 wfms/s waveform capture rate

Trigger System

Trigger System

Trigger Sources	Analog channel (1~4), EXT TRIG, AC Line	
Trigger Mode	Auto, Normal, and Single	
Trigger Coupling	DC	DC coupled trigger
	AC	AC coupled trigger
	HF Reject	High frequency reject, cutoff frequency ~75 kHz (internal trigger only)
	LF Reject	Low frequency reject, cutoff frequency ~75 kHz (internal trigger only)

Trigger System

Noise Rejection	Increase delay for the trigger circuit (internal trigger only), on/off	
Trigger Holdoff Range	8 ns to 10 s	
Trigger Bandwidth	Internal	Analog bandwidth
	External	200 MHz
Trigger Sensitivity	Internal	0.50 div, ≥ 50 mV/div 0.7 div (with noise rejection enabled)
	External	200 mVpp, from DC to 100 MHz 500 mVpp, from 100 MHz to 200 MHz
EXT TRIG	Input Impedance	1 M Ω ±1%, BNC connector
	Trigger Jitter (Typical)	< 1 ns _{rms} Normal acquisition, Edge trigger, trigger level located near 50% of EXT input signal
Trigger Level Range	Internal	±5 div from center screen
	External	±5 V
	AC Line	fixed 40%-60%

Trigger Type

Trigger Type

Trigger Type	Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, Nth Edge trigger, I2C, SPI, RS232/UART, CAN, LIN
Edge	Triggers on the threshold of the specified edge of the input signal. The edge types can be Rising, Falling, or Either. Source channel: CH1~CH4, EXT, or AC Line
Pulse Width	Triggers on the positive or negative pulse, whose time duration is less than a value, greater than a value, or inside a time range. Source channel: CH1~CH4

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Trigger Type	
Slope	Triggers on the positive or negative slope of the specified time, whose time is less than a value, greater than a value, or inside a time range. Source channel: CH1~CH4
Video	Trigger on all lines, specified line, odd/even fields that conform to the video standards. The supported video standards include NTSC, PAL/SECAM, 480p/60Hz, 576p/50Hz, 720p/60Hz, 720p/50Hz, 720p/30Hz, 720p/25Hz, 720p/24Hz, 1080p/60Hz, 1080p/50Hz, 1080p/25Hz, 1080p/24Hz, 1080i/60Hz, and 1080i/50Hz. Source channel: CH1~CH4
Pattern	Identifies a trigger condition by searching for a specified pattern. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X, Rising, or Falling. Source channel: CH1~CH4
Duration	Triggers when the specified pattern meets the specified duration condition. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, and X. The duration is less than a value, greater than a value, inside a time range, or outside a time range. Source channel: CH1~CH4
Timeout	Triggers when duration of a certain event exceeds the specified time. The event can be specified as Rising, Falling, or Either. Source channel: CH1~CH4
Runt	Triggers when the pulses pass through one threshold but fail to pass through another threshold. Source channel: CH1~CH4
Window	Triggers in a specified window state when the rising edge of the signal crosses the upper threshold or the falling edge crosses the lower threshold. The window state can be Enter, Exit, or Time. Source channel: CH1~CH4
Delay	Triggers when the time difference between the specified edges of Source A and Source B meets the preset time. The delay time is less than a value, greater than a value, inside a time range, or outside a time range. Source channel: CH1~CH4
Setup/Hold	When the setup time or hold time between the input clock signal and the data signal is smaller than the specified time. Source channel: CH1~CH4
Nth Edge	Triggers on the Nth edge after the specified idle time. The edge can be specified as Rising or Falling. Source channel: CH1~CH4

Trigger Type

RS232/UART	Triggers on the Start, Error, Check Error, or Data frame of the RS232/UART bus (up to 20 Mb/s). Source channel: CH1~CH4
I2C	Triggers on the Start, Stop, Restart, MissedACK, Address (7 bits, 8 bits, or 10 bits), Data, or Address Data of the I2C bus. Source channel: CH1~CH4
SPI	Triggers on the specified pattern of the specified data width (4 to 32) of SPI bus. CS and Timeout are supported. Source channel: CH1~CH4
CAN	Triggers on the start of a frame, end of a frame, Remote ID, Overload, Frame ID, Frame Data, Data&ID, Frame Error, Bit Fill, Answer Error, Check Error, Format Error, and Random of the CAN signal (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF. Source channel: CH1~CH4
LIN	Triggers on the Sync, ID, Data (length settable), Data&ID, Wakeup, Sleep, and Error of the LIN bus signal (up to 20 Mb/s). Source channel: CH1~CH4

Search & Navigate**Search & Navigate**

Type	Edge, pulse width
Source	Analog channels
Copy	Copy to/from trigger; independent settings including threshold and trigger condition setup
Result Display	Event list or be exported to external/internal memory
Navigate	Time: view acquired waveforms in time order
	Event: use the navigation controls to go to found search events
	Segments: use the navigation controls to play through the acquired segments in UltraAcquire mode



Waveform Measurement

Waveform Measurement

Cursor	Number of Cursors	2 pairs of XY cursors
	Manual Mode	Voltage deviation between cursors (ΔY)
		Time deviation between cursors (ΔX)
		Reciprocal of ΔX (Hz) ($1/\Delta X$)
	Track Mode	Fix Y-axis to track X-axis waveform point's voltage and time values
		Fix X-axis to track Y-axis waveform point's voltage and time values
Auto Measurement	Allow to display cursors during auto measurement	
XY Mode	Measures the voltage parameters of the corresponding channel waveforms in XY time base mode X = Channel 1, Y = Channel 2	

Waveform Measurement


Auto Measurement	Number of Measurements	41 auto measurements; and up to 14 measurements can be displayed at a time.
	Measurement Source	CH1 to CH4, Math1 to Math4
	Measurement Range	Main, Zoom
	All Measurements	Displays 33 measurement items (vertical and horizontal) for the current measurement channel; the measurement results are updated continuously.
	Vertical	Vmax, Vmin, Vpp, Vtop, Vbase, Vamp, Vupper, Vmid, Vlower, Vavg, VRMS, Per. VRMS, Overshoot, Preshoot, Area, Period Area, and AC RMS.
	Horizontal	Period, Frequency, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Positive Pulse Count, Negative Pulse Count, Rising Edge Count, Falling Edge Count, Tvmax, Tvmin, +Slew Rate, and -Slew Rate
	Others	Delay (A↑-B↑), Delay (A↑-B↓), Delay (A↓-B↑), Delay (A↓-B↓), Phase (A↑-B↑), Phase (A↑-B↓), Phase (A↓-B↑), and Phase (A↓-B↓)
	Statistics	Items: Current, Average, Max, Min, Standard Deviation, Count Statistical times settable

Waveform Math**Waveform Math**

Number of Math Functions	4, displays 4 math functions simultaneously
Arithmetic	A+B, A-B, A×B, A/B, FFT, A&&B, A B, A^B, !A, Intg, Diff, Lg, Ln, Exp, Sqrt, Abs, AX+B, LowPass, HighPass, BandPass, and BandStop
Color Grade	FFT supported

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Waveform Math

FFT	Record Size	Up to 1 Mpts
	Window Type	Rectangular, Blackman-Harris, Hanning (default), Hamming, Flatop, and Triangle
	Peak Search	A maximum of 15 peaks, confirmed by the settable threshold and offset threshold set by users

Waveform Analysis**Waveform Analysis**

Store the signal under test in segments according to the trigger events, i.e. save all the sampled waveform data as a segment to the RAM for each trigger event. The maximum number of the sampled segments reaches 500,000.

Waveform Recording

Source	All enabled analog channels
--------	-----------------------------

Analysis

Support playing frame by frame or continuous playing; capable of calculating, measuring, and decoding the played waveforms
--

Pass/Fail Test

Compare the signal under test with the user-defined mask to provide the test results: the number of successful tests, failed tests, and the total number of tests. The pass/fail event can enable immediate stop, beeper, and the screenshot.

Source

Any analog channel

A dimensional view for color grade waveforms, color grade > 16, 256-level color scale display

Color Grade

Source

Any analog channel

Color Theme

Temperature and intensity

Mode

All modes available

Serial Decoding**Serial Decoding**

No. of Decodings	4, decodes and enables/disables four protocol types simultaneously
------------------	--

Decoding Type	Standard: Parallel, RS232/UART, I2C, SPI, LIN, CAN
---------------	--

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110

TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com

www.fesupply.com | www.rigolthai.com



Serial Decoding

Parallel	Up to 4 bits of Parallel decoding, available for any analog channel. User-defined clock and auto clock settings are supported. Source channel: CH1~CH4
RS232/UART	Decodes the RS232/UART (up to 20 Mb/s) bus's TX/RX data (5 to 9 bits), parity (Odd, Even, or None), and stop bits (1 to 2 bits) Source channel: CH1~CH4
I2C	Decodes the address (with or without the R/W bit) of the I2C bus, data, and ACK. Source channel: CH1~CH4
SPI	Decodes the MISO/MOSI data (4 to 32 bits) of the SPI bus. Timeout and CS are supported. Source channel: CH1~CH4
CAN	Decodes the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN bus (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF. Source channel: CH1~CH4
LIN	Decodes the protocol version (1.X or 2.X) of the LIN bus (up to 20 Mb/s). The decoding displays sync, ID, data, and check sum. Source channel: CH1~CH4

Auto**Auto**


AutoScale	Minimum voltage greater than 10 mVpp, duty cycle greater than 1%, and frequency over 35 Hz
-----------	--

Digital Voltmeter**Digital Voltmeter**

Source	Any analog channel
Function	DC, AC+DC _{rms} , AC _{rms}
Resolution	ACV/DCV: 4 bits
Limits Beeper	Support upper/lower limit settings; sounds an alarm when the voltage value is inside or outside of the limit range

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Precision Counter

Precision Counter		
Source	Any analog channel and EXT	
Measurement	Frequency, period, totalize	
Totalizer	Resolution	3 to 6 digits, user-defined
	Max. Frequency	Maximum analog bandwidth
Totalizer	48-bit totalizer	
	Counts the number of the rising edges	
Time Reference	Internal Reference	

Command Set

Command Set	
Common Commands Support	Standard SCPI commands
Error Message Definition	Error Message
Support Status Report Mechanism	Status Reporting
Support Sync Mechanism	Synchronization

Display

Display	
LCD	10.1-inch capacitive multi-touch gesture-enabled display
Resolution	1280 x 800 (Screen Region) 16:9
Graticule	10 horizontal divisions x 8 vertical divisions
Persistence	Off, Infinite, variable persistence (100 ms to 10 s)
Brightness	256 intensity levels (LCD, HDMI)

Processor System

Processor System	
Processor	Cortex-A72, 1.8 GHz, hexa-core
System Memory	4 GB RAM

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Processor System


Operating System	Android
Internal Non-volatile Memory	8 GB

I/O**I/O**

USB3.0 Host	2 on the front panel
USB3.0 Device	1 on the rear panel
LAN Port	1 on the rear panel, 10/100/1000 Base-T, supporting LXI-C
Web Control	Support Web Control interface (input the IP address of the oscilloscope into the Web browser to display the operation interface of the oscilloscope)
AUX Out	BNC output on the rear panel $V_o(H) \geq 2.5\text{ V}$ open circuit, $\geq 1.0\text{ V}$ 50 Ω to GND $V_o(L) \leq 0.7\text{ V}$ to load $\leq 4\text{ mA}$; $\leq 0.25\text{ V}$ 50 Ω to GND
	Trig Out Output a pulse signal when the oscilloscope is triggered
	Pass/Fail Output a pulse signal when a pass/fail event occurs. Support user-defined pulse polarity and pulse time (100 ns to 10 ms)
	Rise Time $\leq 1.5\text{ ns}$
	Input Interface 1, BNC connector on the rear panel
10 MHz Reference Clock In/Out	Output Interface 1, BNC connector on the rear panel
	Input Mode 50 Ω , with the amplitude 130 mVpp to 4.1 Vpp (-10 dBm, 20 dBm), frequency 10 MHz $\pm$ 10 ppm
	Output Mode 50 Ω , 1.5 Vpp sine waveform
HDMI Video Output	1 on the rear panel, HDMI 1.4, A plug; used to connect an external monitor or projector
Probe Compensation Output	1 kHz frequency, 0 to 3 V amplitude, Square

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Power

Power	
Power Voltage	AC 100 to 240 V, 50 to 60 Hz
Power	400 VA maximum (connect various interfaces, USB storage device, and active probes)
Fuse	3.15 A, T degree, 250 V

Environment

Environment		
Temperature Range	Operating	0°C to +50°C
	Non-operating	-30°C to +60°C
Humidity Range		below +30°C, ≤90% RH (without condensation)
	Operating	+30°C to +40°C, ≤75% RH (without condensation)
		+40°C to +50°C, ≤45% RH (without condensation)
	Non-operating	below 60°C: ≤90% RH (without condensation)
Altitude	Operating	Below 3,000 m
	Non-operating	Below 15,000 m

Warranty and Calibration Interval

Warranty and Calibration Interval	
Warranty	Three years for the mainframe, excluding the probes and accessories.
Recommended Calibration Interval	18 months

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Regulations

Regulations

Compliant with EMC DIRECTIVE 2014/30/EU, compliant with or higher than the standards specified in IEC 61326-1:2013/EN 61326-1:2013 Group 1 Class A

CISPR 11/EN 55011

Electromagnetic Compatibility

IEC 61000-4-2:2008/EN 61000-4-2

±4.0 kV (contact discharge), ±8.0 kV (air discharge)

IEC 61000-4-3:2002/EN 61000-4-3

3 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)

IEC 61000-4-4:2004/EN 61000-4-4

1 kV power line

IEC 61000-4-5:2001/EN 61000-4-5

0.5 kV (phase-to-neutral voltage); 1 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)

IEC 61000-4-6:2003/EN 61000-4-6

3 V, 0.15-80 MHz

IEC 61000-4-11:2004/EN 61000-4-11

Voltage dip: 0% UT during half cycle; 0% UT during 1 cycle ; 70% UT during 25 cycles
short interruption: 0% UT during 250 cycles

EN 61010-1:2019

EN 61010-031:2015

IEC 61010-1:2016

IEC 61010-2-030:2017

Safety

UL 61010-1:2012 R7

UL 61010-2-31:2017 R2

CAN/CSA-22.2 No. 61010-1-12:2017

CAN/CSA-22.2 No. 61010-2-30:2018

CAN/CSA-22.2 No. 61010-031-07:201

Vibration

Meets GB/T 6587; class 2 random

Meets MIL-PRF-28800F and IEC60068-2-6; class 3 random

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110

TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com

www.fesupply.com | www.rigolthai.com



Regulations

	Meets GB/T 6587-2012; class 2 random
Shock	Meets MIL-PRF-28800F and IEC 60068-2-27; class 3 random
	In non-operating conditions: 30 g, half-sine wave, 11 ms duration, 3 shocks along the main axis, total of 18 shocks

Mechanical Characteristics**Mechanical Characteristics**

Dimensions	358.14 mm (W) x 214.72 mm (H) x 120.62 mm (D)
Rack Mount Kit	4U
Weight ^[6]	Net: 3.8 kg
	Shipping: 5.37 kg

Non-volatile Memory**Non-volatile Memory**

	Setup/Image	setup (*.stp), image (*.png, *.bmp, *.jpg)
Data/File Storage	Waveform Data	CSV waveform data (*.csv), binary waveform data (*.bin), list data (*.csv), and reference waveform data (*.ref, *.csv, *.bin)
Internal Capacity		8 GB
Reference Waveform		Displays 10 internal waveforms
Setting		Limited by size of USB drive
USB Capacity		Industry standard flash drives

NOTE:

- [1]: If any one of the channels is enabled, it is called single channel mode.
- [2]: For 4-channel models, if two of the channels are enabled, it is called half channels mode.
- [3]: For 2-channel models, if two channels are enabled, it is called all channels mode. For 4-channel models, if any three channels or all four channels are enabled, it is called all channels mode.
- [4]: 500 μ V/div is a magnification of 1 mV/div setting. For vertical accuracy calculations, use full scale of 8 mV for sensitivity setting.
- [5]: For any channel, under the same input impedance with DC-coupled, the Volts/div setting is the same for 100 mV/div and 200 mV/div setting.

[6]: Standard configuration.

FES

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Order Information and Warranty Period

Order Information

Order Information	Order No.
Model	
70 MHz, 2 GSa/s, 50 Mpts, 2CH DHO	DHO1072
70 MHz, 2 GSa/s, 50 Mpts, 4CH DHO	DHO1074
100 MHz, 2 GSa/s, 50 Mpts, 2CH DHO	DHO1102
100 MHz, 2 GSa/s, 50 Mpts, 4CH DHO	DHO1104
200 MHz, 2 GSa/s, 50 Mpts, 2CH DHO	DHO1202
200 MHz, 2 GSa/s, 50 Mpts, 4CH DHO	DHO1204
Standard Accessories	
Power cord (based on destination country)	— —
USB Cable	— —
4 Passive HighZ Probes (350 MHz) Standard for DHO1204, 2 Passive HighZ Probes (350 MHz) Standard for DHO1202	PVP2350
4 Passive HighZ Probes (150 MHz), Standard for DHO1104/ DHO1074	PVP3150
2 Passive HighZ Probes (150 MHz), Standard for DHO1102/ DHO1072	PVP3150
Bandwidth Upgrade Option	
70 MHz to 100 MHz Upgrade Option	DHO1000-BWU7T10
70 MHz to 200 MHz Upgrade Option	DHO1000-BWU7T20
100 MHz to 200 MHz Upgrade Option	DHO1000-BWU10T20
Memory Depth Upgrade Option	
100 Mpts Memory Depth Upgrade Option	DHO1000-RLU-01

NOTE:

For all the mainframes, accessories, and options, please contact the local office of RIGOL.

Warranty Period


Three years for the mainframe, excluding the probes and accessories.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Option Ordering and Installation Process

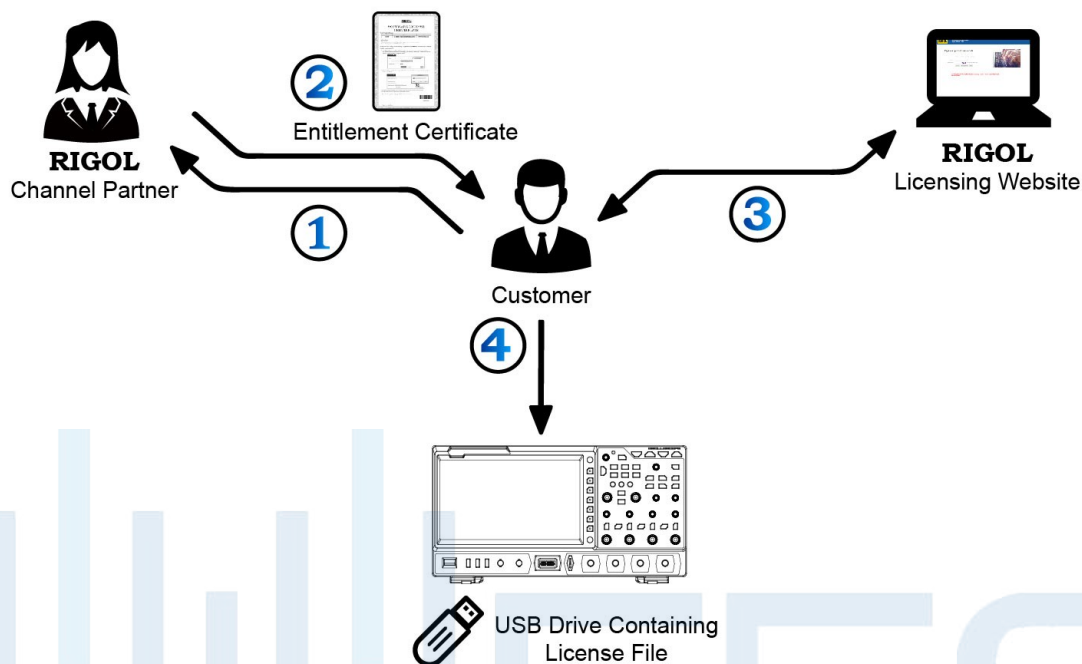

1. According to the usage requirements, please purchase the specified function options from **RIGOL Sales Personnel**, and provide the serial number of the instrument that needs to install the option.
2. After receiving the option order, the **RIGOL** factory will mail the paper software product entitlement certificate to the address provided in the order.
3. Log in to **RIGOL** official website for registration. Use the software key and instruments serial number provided in the entitlement certificate to obtain the option license code and the option license file.
4. Download the option license file to the root directory of the USB storage device, and connect the USB storage device to the instrument properly. After the USB storage device is successfully recognized, the **Option install** menu is activated. Press this menu key to start installing the option.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com

