

DG900 Pro Series

Function/Arbitrary Waveform Generator



Data Sheet

DSB15103-1110

June. 2025

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110

TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com

www.fesupply.com | www.rigolthai.com

Line Official




Facebook




DG900 Pro Series Function/Arbitrary Waveform Generator

Delicate Design, Full Functionality

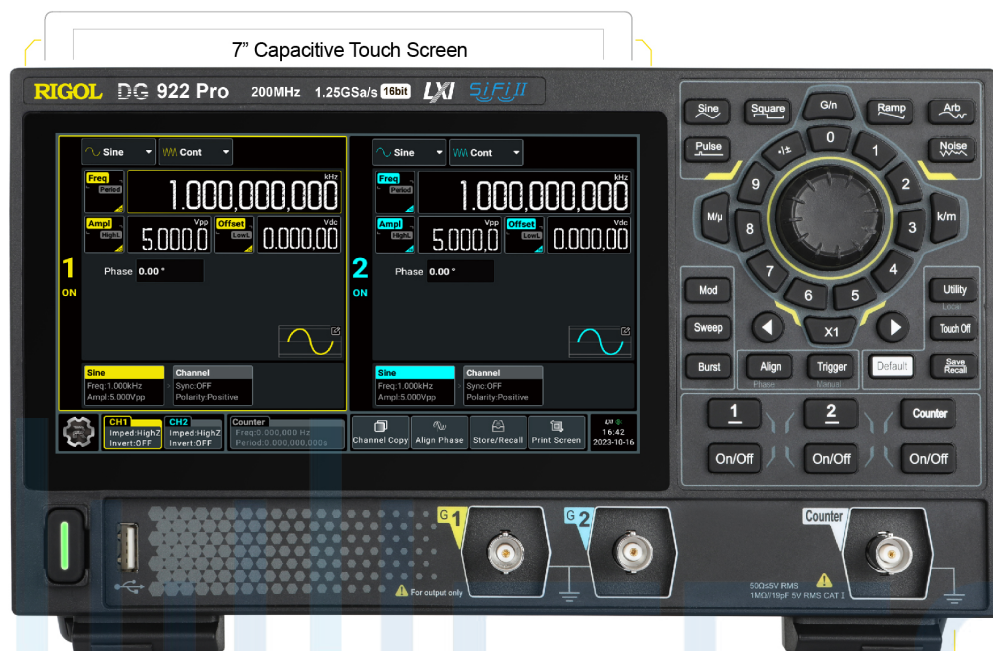


Independent Counter Input Terminal

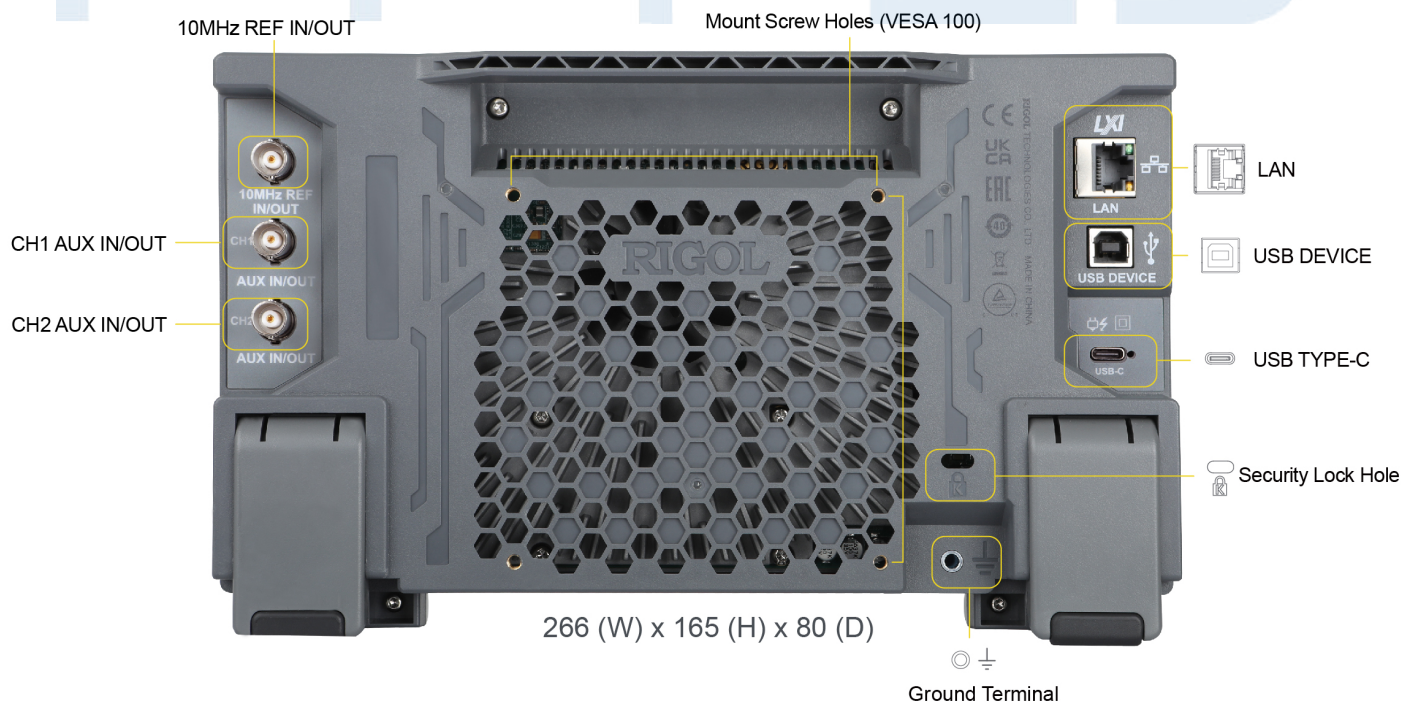

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com





Application Scenarios

With a compact size, this series is highly portable for use in various working environments, either on your workbench, in the classroom, or in the field.

The rear-panel mount screw holes (VESA 100×100) allow you to fix the instrument to a compatible bracket, saving valuable space on your bench.

It can be powered by the mobile power source via its Type-C power interface, satisfying your testing requirements in the field.



Product Features

● High Performance

It provides 16-bit vertical resolution, up to 1.25 GSa/s sample rate and 200 MHz output frequency. The rise time is as low as 3 ns.

● Frequency Counter

It provides a standard 7-digit counter with a max. frequency of 1 GHz. Equipped with an independent input connector for counter measurements, it provides a more simplified and accurate way to measure frequencies.

● Various Modulation Types

It supports various analog and digital modulation types including AM, FM, PM, ASK, FSK, PSK, and PWM. Both internal and external modulation sources are available for different test scenarios.

● Multiple Built-in Waveforms

It has multiple built-in waveforms, covering the frequently used signals in engineering, medical electronics, automobile electronics, mathematics, and other fields.

● Standard Sequence Mode

It supports a sequence that is a combination of multiple waveforms (1 to 64). The total length is up to 16 Mpts/CH (32 Mpts/CH optional).

● Multiple Connectivity Options

It provides various interfaces including USB Host, USB Device, and LAN (LXI Core 2011 Device). Besides, it allows you to control the instrument remotely via Web Control.




Applications



Education & Training



Electronic Test & Design

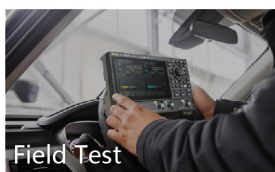


Field Test



Floating Ground Test

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Product Features


Product Features

- Max. sample rate: 1.25 GSa/s
- Max. output frequency: 200 MHz
- 16-bit vertical resolution
- Arbitrary waveform editing function with a max. Arb waveform length of 16 Mpts/CH (32 Mpts/CH optional)
- Built-in high-order harmonic generator (max. 20th order)
- Independent signal frequency measurement channel with a max. frequency of 1 GHz
- USB and LAN interfaces for remote connection
- Type-C power interface for powering the instrument with mobile power source, satisfying testing requirements in the field
- Standard Web Control function for easier remote cooperation

DG900 Pro series Function/Arbitrary Waveform Generator provides up to 1.25 GSa/s sample rate and 16 Mpts/CH memory depth (standard). It is a cost-effective dual-channel function/arbitrary waveform generator that combines multiple functions including Function Generator, Arbitrary Waveform Generator, Noise Generator, Pulse Generator, Harmonic Generator, Analog/Digital Modulator and Counter.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Specifications

Specifications are valid under the following conditions:

The instrument is within the calibration period and has been running ceaselessly for over 20 minutes under the specified operating temperature ($23^{\circ}\text{C} \pm 5^{\circ}\text{C}$).

All specifications are guaranteed except the parameters marked with "Typical".

Technical Specifications

Technical Specifications			
Model	DG902 Pro	DG912 Pro	DG922 Pro
Max. Frequency	70 MHz	150 MHz	200 MHz
No. of Channels	2		
Sample Rate	1.25 GSa/s		
Vertical Resolution	16 bits		
Waveform Memory Depth	16 Mpts/CH (standard), 32 Mpts/CH (optional)		

Waveform Output

Waveform Output	
Output Mode	Continuous, Modulation, Sweep, Burst, Advanced
Continuous	Sine, Square, Ramp, Pulse, Noise, Arb, Harmonic
Modulation	AM, FM, PM, SUM, ASK, FSK, PSK, PWM
Sweep	Linear, Log, Step
Burst	N-Cycle, Gated
Advanced	Sequence, Arb

Frequency Characteristics

Frequency Characteristics			
	DG902 Pro	DG912 Pro	DG922 Pro
Sine	1 μHz to 70 MHz	1 μHz to 150 MHz	1 μHz to 200 MHz

Frequency Characteristics

	DG902 Pro	DG912 Pro	DG922 Pro
Square	1 μ Hz to 60 MHz		
Ramp	1 μ Hz to 3 MHz	1 μ Hz to 5 MHz	1 μ Hz to 5 MHz
Pulse	1 μ Hz to 50 MHz		
Arb	1 μ Hz to 30 MHz	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz
Harmonic	1 mHz to 35 MHz	1 mHz to 75 MHz	1 mHz to 100 MHz
Sequence	1 μ Sa/s to 312.5 MSa/s		
Noise (-3 dB)	Typical (0 dBm), >250 MHz bandwidth		
Output Frequency Resolution	1 μ Hz or 12 digits		
Frequency Accuracy	Typical (1 MHz Frequency) $\pm 10^{-6}$ of the setting (except Arb and sequence), 0°C to 40°C $\pm 10^{-6}$ of the setting ± 1 μ Hz (Arb and sequence), 0°C to 40°C		
Time Base Accuracy	± 2 ppm, 0°C to 40°C		


Output Characteristics

Output Characteristics

Amplitude Range (into 50 Ω)	≤ 50 MHz: 1 mVpp to 10 Vpp ≤ 100 MHz: 1 mVpp to 5 Vpp ≤ 200 MHz: 1 mVpp to 2 Vpp
Amplitude Range (into HighZ)	≤ 50 MHz: 2 mVpp to 20 Vpp ≤ 100 MHz: 2 mVpp to 10 Vpp ≤ 200 MHz: 2 mVpp to 4 Vpp
Amplitude Accuracy ^[1]	$\pm (1\% \text{ of setting} + 2 \text{ mVpp})$ (into 50 Ω) $\pm (1\% \text{ of setting} + 5 \text{ mVpp})$ (into HighZ)
Amplitude Resolution	0.1 mVpp, 0.1 mVrms, 1 mV, 0.1 dBm or 4 digits (whichever is lower)
Amplitude Unit ^[2]	Vpp, Vrms, dBm, V

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Output Characteristics

Offset Range	± 5 Vpk (ac + dc) (into 50 Ω)
	± 10 Vpk (ac + dc) (into HighZ)
Offset Accuracy	$\pm (1\% \text{ of } \text{setting} + 2 \text{ mV} + 0.5\% \text{ of amplitude (Vpp)})$ (into 50 Ω)
	$\pm (1\% \text{ of } \text{setting} + 5 \text{ mV} + 1\% \text{ of amplitude (Vpp)})$ (into HighZ)
Offset Resolution	1 mV or 4 digits
Output Impedance	Typical (0 dBm, 0 Vdc), 50 $\Omega \pm 1\%$
Protection	Waveform outputs are automatically disabled when overloaded



Signal Characteristics

Signal Characteristics

Sine (50 Ω)	Harmonic Distortion	Typical (0 dBm) 10 Hz to <10 MHz: <-55 dBc $\geq$ 10 MHz to <50 MHz: <-50 dBc $\geq$ 50 MHz: <-40 dBc
	Total Harmonic Distortion (THD)	Typical (1 Vpp) 10 Hz to 20 kHz: <0.1%
	Spurious (non-harmonic)	Typical (1 Vpp) 10 Hz to <10 MHz: <-65 dBc $\geq$ 10 MHz to <50 MHz: <-60 dBc $\geq$ 50 MHz: <-50 dBc + 6 dBc/octave
	Phase Noise	Typical (1 Vpp, 10 kHz) 20 MHz: <-110 dBc/Hz
	Residual Clock Noise	Typical (0 dBm), -60 dBm
	Interchannel Crosstalk	Typical (1 Vpp, 0 V) 100 MHz: <-75 dBc $\geq$ 100 MHz: <-65 dBc
	Amplitude Flatness	Typical (relative to 1 kHz Sine, 0 dBm) <10 MHz: $\pm$ 0.1 dB $\geq$ 10 MHz to <50 MHz: $\pm$ 0.2 dB $\geq$ 50 MHz to <100 MHz: $\pm$ 0.5 dB $\geq$ 100 MHz: $\pm$ 1.0 dB
	Phase	-360° to +360°, 0.01° resolution
	Rise/Fall Time	Typical ($\leq$ 2 Vpp amplitude, 50 Ω load), $\leq$ 3 ns
	Overshoot	Typical (0 dBm amplitude, >1 kHz frequency), <5%
Square	Jitter (rms)	Typical (0 dBm amplitude, >1 kHz frequency), 200 ps
	Phase	-360° to +360°, 0.01° resolution

Signal Characteristics

Ramp	Linearity	Typical (1 kHz frequency, 1 Vpp amplitude, 100% symmetry) $\leq 0.1\%$ of peak output (10% to 90% amplitude)
	Symmetry	0% to 100%
	Phase	-360° to $+360^\circ$, 0.01° resolution
	Pulse Width	9 ns to (pulse period - 9 ns)
Pulse	Pulse Width Resolution	100 ps or 5 digits
	Duty Cycle	0.01% to 99.99%
	Rise/Fall Time	3 ns to $0.625 \times$ pulse period
	Delay Time	0 ps to period – [pulse width + $0.8 \times$ (Leading Edge Time + Trailing Edge Time)] (Continuous mode)
	Overshoot	Typical (0 dBm amplitude, > 1 kHz frequency), $< 5\%$
	Jitter (rms)	Typical (0 dBm amplitude, > 1 kHz frequency), 200 ps
Noise	Phase	-360° to $+360^\circ$, 0.01° resolution
	Type	White noise
	Rise/Fall Time	Typical (< 1 Vpp amplitude), ≤ 5 ns
Arb	Jitter (rms)	Typical (0 dBm amplitude, > 1 kHz frequency), 200 ps
	Phase	-360° to $+360^\circ$, 0.01° resolution
	Harmonic Order	≤ 20
Harmonic Output	Harmonic Type	Order, Combine
	Harmonic Amplitude	The amplitude of each order of the harmonic can be set.
	Harmonic Phase	The phase of each order of the harmonic can be set.

Modulation Characteristics

Modulation Characteristics

Modulation Type	AM, FM, PM, ASK, FSK, PSK, PWM, SUM
-----------------	-------------------------------------

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Modulation Characteristics

AM	Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
	Modulation Source	Internal/External
	Internal Modulating Waveform	Sine, Square, Triangle, UpRamp, DnRamp, Noise, Arb
	Modulation Depth	0% to 120%
	Internal Modulation Frequency	1 mHz to 1 MHz
FM	Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
	Modulation Source	Internal/External
	Internal Modulating Waveform	Sine, Square, Triangle, UpRamp, DnRamp, Noise, Arb
	Internal Modulation Frequency	1 mHz to 1 MHz
PM	Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
	Internal Modulation Source	Internal/External
	Internal Modulating Waveform	Sine, Square, Triangle, UpRamp, DnRamp, Noise, Arb
	Internal Modulation Frequency	1 mHz to 1 MHz
	Phase Deviation	0° to 360°, 0.01° resolution
ASK/FSK/PSK	Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
	Modulation Source	Internal/External
	Internal Keying Frequency	1 mHz to 1 MHz
	No. of Levels	2



Modulation Characteristics

PWM	Carrier Waveform	Pulse
	Modulation Source	Internal/External
	Internal Modulating Waveform	Sine, Square, Triangle, UpRamp, DnRamp, Noise, Arb
	Internal Modulation Frequency	1 mHz to 1 MHz
	Width Deviation	0% to 49.99% of the pulse period
SUM	Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
	Sum Source	Sine, Square, Ramp, Noise, Arb, channel waveform
	Sum Ratio	0% to 100% of the amplitude setting (Vpp)

Burst Characteristics**Burst Characteristics**

Carrier Waveform	Sine, Square, Ramp, Noise, Arb (except DC)
Burst Count	1 to 1,000,000/Infinite
Internal Burst Period	4 μ s to 8000 s
Burst Phase	-360° to +360°, 0.01° resolution
Trigger Delay	0 ns to 20 s
Gate Source	External trigger
Trigger Source	Internal, External leading edge, external trailing edge, Manual

Sweep Characteristics**Sweep Characteristics**

Type	Linear, Log, Step
Carrier Waveform	Sine, Square, Ramp, Arb (except DC)
Sweep Time	1 ms to 250,000 s



Sweep Characteristics

Start/Stop Frequency	Consistent with the upper/lower limit of the corresponding carrier frequency
Hold/Return Time	0 s to 3600 s
Orientation	Up/Down
Trigger Source	Internal, External leading edge, external trailing edge, Manual
Mark	Falling edge of the sync signal (programmable)

Advanced Mode Characteristics


Advanced Mode Characteristics

Sub-mode	Arb, Sequence	
Arb	Sample Rate	1 μ Sa/s to 312.5 MSa/s
	Sample Rate Accuracy	10^{-6} Sa/s
	Sample Rate Resolution	1 μ Sa/s or 12 digits
	Waveform Length	32 pts/CH to 16 Mpts/CH (32 Mpts/CH optional)
	Filter Mode	Normal, Step, Interpolation
Sequence	Sample Rate	1 μ Sa/s to 312.5 MSa/s
	Sample Rate Accuracy	10^{-6} Sa/s
	Sample Rate Resolution	1 μ Sa/s or 12 digits
	Sequence Length	32 pts/CH to 16 Mpts/CH (32 Mpts/CH optional)
	No. of Waveform Entries	64
	Loop	0 to 256
	Filter Mode	Normal, Step, Interpolation



Frequency Counter

Frequency Counter		
Measurement Function	Frequency, period, positive pulse width, negative pulse width, duty cycle	
Input Impedance	50 Ω $\pm$ 2%, 1 M Ω $\pm$ 5%	
Counter Accuracy	0 to 250 MHz: 7 digits 250 MHz to 500 MHz: 6 digits 500 MHz to 1 GHz: 5 digits	
Trigger Level	0 V	
Input Coupling Mode	50 Ω Load	DC coupling
	1 M Ω Load	AC/DC coupling
Input Amplitude	50 Ω Load	DC to 500 MHz: 100 mVpp to 2 Vpp 500 MHz to 1 GHz: 300 mVpp to 2 Vpp
	1 M Ω Load	500 mVpp to 5 Vpp (Vac + dc)
Input Disruptive Level	50 Ω Load	4 Vpp
	1 M Ω Load	5 Vpp
Input Frequency Range	50 Ω Load	0 to 250 MHz
		250 MHz to 500 MHz 500 MHz to 1 GHz
	1 M Ω Load	0 to 250 MHz
Effective Signal Frequency	50 Ω Load	DC to 1 GHz
	1 M Ω Load	DC to 250 MHz (DC coupling)
HF Reject	60 kHz/None (available only for 1 M Ω load)	
Connector	BNC, on the rear panel	



AUX IN/OUT Characteristics

AUX IN/OUT Characteristics		
External Modulation Input	Input Range	ASK, FSK, PSK: 3.3 V logic level AM, FM, PM, PWM: $\pm 5V$ full range
	Frequency Range	DC to 100 kHz (1 MSa/s)
	Input Impedance	10 k Ω $\pm$ 10%
	Level	TTL-compatible
External Trigger/ Gated Burst Input	Impedance	10 k Ω $\pm$ 10%
	Edge	Positive/negative(selectable)
	Min. Pulse Width	100 ns
	Trigger Delay Range	0 ns to 20 s
	Trigger Delay Resolution	100 ps or 5 digits
Trigger Output	Jitter (rms)	Typical (trigger input to signal output, Burst mode), 1.5 ns
	Level	TTL-compatible
	Output Impedance	50 Ω $\pm$ 5%
	Jitter (rms)	Typical (Continuous mode), 1.5 ns
Sync Output	Level	TTL-compatible
	Impedance	50 Ω $\pm$ 5%

10 MHz Reference In/Out Characteristics

10 MHz In/Out Characteristics		
External Reference Input	Impedance	1 k Ω
	Input Coupling	AC coupling
	Required Input Voltage	100 mVpp to 5 Vpp
	Lock Range	10 MHz $\pm$ 100 Hz

10 MHz In/Out Characteristics

Internal Reference Output	Impedance	50 Ω
	Output Coupling	AC coupling
	Level	Typical (50 Ω Load), 1.2 Vpp

Protection**Protection**

Overvoltage Protection	Occurred when:
	The instrument amplitude setting is greater than 4 Vpp or the output AC + DC is greater than 2 Vdc and the input voltage is greater than $\pm 12 \times (1 \pm 5\%)V$ (<10 kHz). Disruptive voltage: $\pm 18(V_{ac} + dc)$
	The instrument amplitude setting is less than or equal to 4 Vpp or the output AC + DC is less than 2 Vdc and the input voltage is greater than $\pm 2.5 \times (1 \pm 5\%)V$ (<10 kHz). Disruptive voltage: $\pm 3.5(V_{ac} + dc)$

NOTE:

[1]: 1 kHz Sine, amplitude > 1 mVpp, 0 V offset, unit: Vpp

[2]: dBm is available only when the load impedance is not set to HighZ; Vrms and dBm are not available for Arb, Harmonic, and Advanced function; Vpp and V (high level and low level) are available for all waveform types.



General Specifications

Characteristics

Characteristics	
Display	7-inch touch screen, 1024 x 600 resolution
Stabilization Time	At least 20-minute warm-up
Internal Non-volatile Memory	32 GB

Power Supply

Power Supply	
Power Interface	USB Type-C Interface
Input Voltage	USB PD 15 V, 3 A
Consumption	45 W (max.)

Interface

Interface	
LAN	1 at rear panel, 10/100 BASE-T port, supporting LXI-C
Web Control	Support Web Control (input the IP address of the instrument into the Web browser to display the operation interface)
USB Host	1 at front panel
USB Device	1 at rear panel, supporting TMC

Mechanical Characteristics

Mechanical Characteristics	
Dimension	266 mm (W) x 165 mm (H) x 80 mm (D)
Weight	Package excluded: <1.78 kg
	Package included: <2.78 kg

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Environment

Environment		
Temperature Range	Operating	0°C to +40°C
	Non-operating	-20°C to +60°C
Humidity Range	Operating	0°C to +40°C, ≤80% RH (without condensation)
	Non-operating	-20°C to 40°C, ≤90% RH (without condensation)
		below 60°C, ≤80% RH (without condensation)
Altitude	Operating	Below 3,000 m
	Non-operating	Below 12,000 m

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Regulation Standards

Regulation Standards

Electromagnetic Compatibility	Compliant with EMC Directive (2014/30/EU), compliant with or higher than the standards specified in EN 61326-1: 2013, EN 61326-2-1:2013, EN IEC 61000-3-2:2019+A1, EN 61000-3-3:2013+A1:2019	
	CISPR 11:2009+A1 Class A	
	EN IEC 61000-3-2:2019+A1	Harmonics, Class A
	EN 61000-3-3:2013+A1:2019	Voltage flicker
	EN 61000-4-2:2009	±4.0 kV (contact discharge), ±8.0 kV (air discharge)
	EN 61000-4-3:2006+A1+A2	10 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 6 GHz)
	EN 61000-4-4:2004+A1	2 kV power cord
	EN 61000-4-5:2006	1 kV (phase-to-neutral voltage); 2 kV (phase-to-earth voltage); 2 kV (neutral-to-earth voltage)
	EN 61000-4-6:2009	10 V, 0.15 MHz to 80 MHz
	EN 61000-4-11:2004	Voltage dip: 0% UT during half cycle; 0% UT during 1 cycle; 70% UT during 25 cycles Short interruption: 0% UT during 250 cycles
Safety	EN 61010-1:2010+A1:2019	
	IEC 61010-1:2010+A1:2016	
Vibration	UL 61010-1: 2012 R7.19	
	CAN/CSA-C22.2 NO. 61010-1-12 + GI1 + GI2 (R2017) + A1	
Shock	Meets GB/T 6587; class 2 random	
	Meets MIL-PRF-28800F and IEC60068-2-6; class 3 random	
	Meets GB/T 6587-2012; class 2 random	
	Meets MIL-PRF-28800F and IEC 60068-2-27; class 3 random	
	(in non-operating conditions: 30 g, half sine, 11 ms duration, 3 shocks along the main axis, a total of 18 vibrations)	

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
 TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
 www.fesupply.com | www.rigolthai.com



Warranty and Calibration Interval

Warranty and Calibration Interval

Warranty	3 years (excluding the accessories)
----------	-------------------------------------

Recommended Calibration Interval	12 months
-------------------------------------	-----------



F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Order Information and Warranty Period

Order Information

Order Information	Order No.
Model	
70 MHz Bandwidth, 1.25 GSa/s Sample Rate	DG902 Pro
150 MHz Bandwidth, 1.25 GSa/s Sample Rate	DG912 Pro
200 MHz Bandwidth, 1.25 GSa/s Sample Rate	DG922 Pro
Standard Accessories	
Power Adaptor Conforming to the Standard of the Destination Country	— —
Ground Lead	— —
USB Cable	— —
One BNC Cable	CB-BNC-BNC-MM-100
Upgrade Options	
32 Mpts/CH Memory Depth Upgrade Option	DG900 Pro-3RL
Optional Accessories	
40 dB Attenuator (50 Ω , 1 W)	RA5040K

Warranty Period


Three years for the mainframe, excluding the accessories.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com



Option Ordering and Installation Process

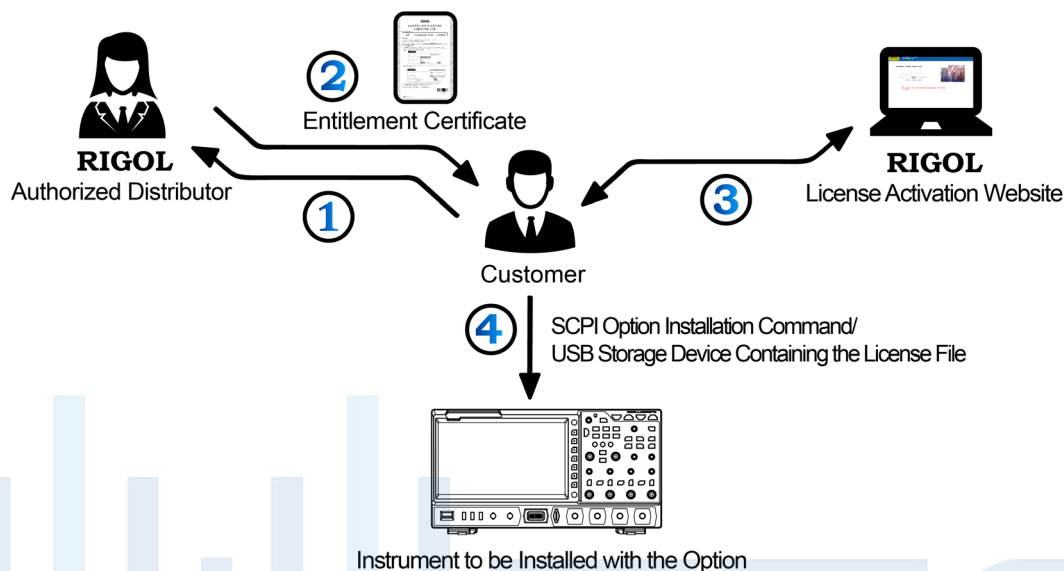

1. According to the usage requirements, please purchase the specified function options from **RIGOL Sales Personnel**, and provide the serial number of the instrument that needs to install the option.
2. After receiving the option order, the **RIGOL** factory will mail the paper software product entitlement certificate to the address provided in the order.
3. Log in to **RIGOL** official website for registration. Use the software key and instruments serial number provided in the entitlement certificate to obtain the option license code and the option license file.
4. Install the option by running the SCPI command concerning the option installation. You can also save the option license file to the root directory of the USB storage device. Then insert it to the instrument. After being recognized, follow the instructions to install the option.

NOTE:

If any problems occur during the option installation process, please contact **RIGOL** technical team.

F.E.S. Co., Ltd.

1000/24, P.B. Tower, 8 floor, Sukhumvit 71 Rd., North Klongtan, Wattana, Bangkok 10110
TEL: 02-064-4050 or 02-064-4051 | FAX: 02-010-4262 | Email: info@fesupply.com
www.fesupply.com | www.rigolthai.com

Line Official



Facebook

